

# KOMATSU

## HB365LC-3

*Hybrid*

EPA Tier 4 Final Engine  
Australia and New Zealand Specifications



Photo may include optional equipment.

Hybrid hydraulic  
Excavator

**NET Horsepower**  
201 kW @ 1950 rpm  
269 HP @ 1950 rpm

**Operating weight**  
37,180 - 38,780 kg

**Bucket capacity**  
0.68 - 1.96 m<sup>3</sup>



## HB365LC-3

NET Horsepower

**201 kW @ 1950 rpm**  
**269 HP @ 1950 rpm**

Operating weight

**37,180 - 38,780 kg**

Bucket capacity

**0.68 - 1.96 m<sup>3</sup>**



# High production and low fuel consumption

**A powerful Komatsu SAA6D114E-6 engine** provides a net output of 201 kW 269 HP. This engine is EPA Tier 4 Final emissions certified.

**Temperature controlled fan clutch** helps improve fuel efficiency and lower sound levels.

**An ultra low idle speed** and Komatsu hybrid technology work together to help reduce fuel consumption up to 20%.

**DEF (Diesel Exhaust Fluid) tank and pump** are separated and located for easy service access. DEF system components are heated for operation in cold temperatures.

**Variable Geometry Turbocharger (VGT)** uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

**Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR) system** reduce particulate matter and NOx while providing automatic regeneration that does not interfere with daily operation.

#### **Large displacement high efficiency pumps**

helps provide high flow output at lower engine speed, improving efficiency.

**Electrically driven swing motor** powered by a Komatsu Ultra Capacitor provides high swing power and speed allowing oil flow, which would be used for swing, to be dedicated to the boom, arm, and bucket functions.

**Engine driven generator** charges the Komatsu ultra capacitor when required and can function as an electric motor to assist in engine response from ultra low idle.

**Six working modes** are designed to match engine speed, pump delivery and system pressure to a wide variety of applications.

**Two boom mode settings** provide power mode for maximum digging force or smooth mode for fine grading operations.

#### **Komatsu's Closed Centre Load Sensing (CLSS)**

hydraulic system provides quick response and smooth operation to maximise productivity.

#### **Large LCD colour monitor:**

- 7" high resolution display
- Provides "Ecology Guidance" for fuel efficient operation
- Enhanced attachment control

#### **Peace of mind**

The hybrid power train is covered by a 48 month / 10,000 hour warranty.

**KomVision** is a new rear view monitoring system display has a rear view camera image that is continuously displayed together with the gauges and important vehicle information. This enables the operator to carry out work while easily checking the surrounding area.



**The Komtrax® telematics system** is standard on Komatsu equipment with no subscription-fee's throughout the life of the machine. Using the latest wireless technology, Komtrax® transmits valuable information such as location, utilisation, and maintenance records to a PC or smartphone app. Custom machine reports are provided for identifying machine efficiency and operating trends.

Komtrax® also provides advanced machine troubleshooting capabilities by continuously monitoring machine health.

#### **Enhanced working environment**

- High back, heated air suspension operator seat with adjustable armrests
- Climate control system automatically adjusts heating and cooling for comfortable operator environment.
- Integrated ROPS cab design (ISO 12117-2)
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard (ISO 10262)
- Standard pattern change valve to switch from ISO to BH control pattern
- Aux jack and (2) 12V power outlets

#### **Komatsu designed and manufactured components**

**Handrails (standard)** located on the machine upper structure provide a convenient work area in front of the engine.

**Battery disconnect switch** allows a technician to disconnect the power supply before servicing the machine.

**Heavy duty boom** design with large one piece castings provide increased strength and durability.

**Komatsu Auto Idle and Auto Idle Shutdown** systems helps reduce nonproductive engine idle time and reduces operating costs.

**Operator Identification system** scan track key machine operation and application information for up to 100 individual ID codes and provide information through Komtrax®.



# Performance features


## Komatsu's new emission regulations-compliant engine

regulations effective in 2014 require the reduction of NO<sub>x</sub> emissions to one tenth or below from the preceding regulations. In addition to refining the Tier 4 Interim technologies, Komatsu has developed a new Selective Catalytic Reduction (SCR) device in-house.

## Technologies applied to new engine


### Heavy-duty aftertreatment system

This new system combines a Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR). The SCR NO<sub>x</sub> reduction system injects the correct amount of Diesel Exhaust Fluid (DEF) at the proper rate, thereby decomposing NO<sub>x</sub> into non-toxic water vapor (H<sub>2</sub>O) and nitrogen gas (N<sub>2</sub>).

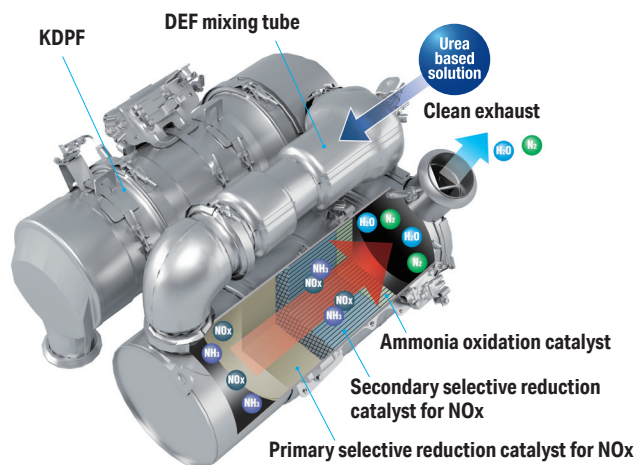


## Advanced electronic control system

the electronic control system performs high-speed processing of all signals from sensors installed in the vehicle providing total control of equipment in all conditions of use. Engine condition information is displayed via an on-board network to the monitor inside the cab, providing necessary information to the operator. Additionally, managing the information via Komtrax® helps customers keep up with required maintenance.

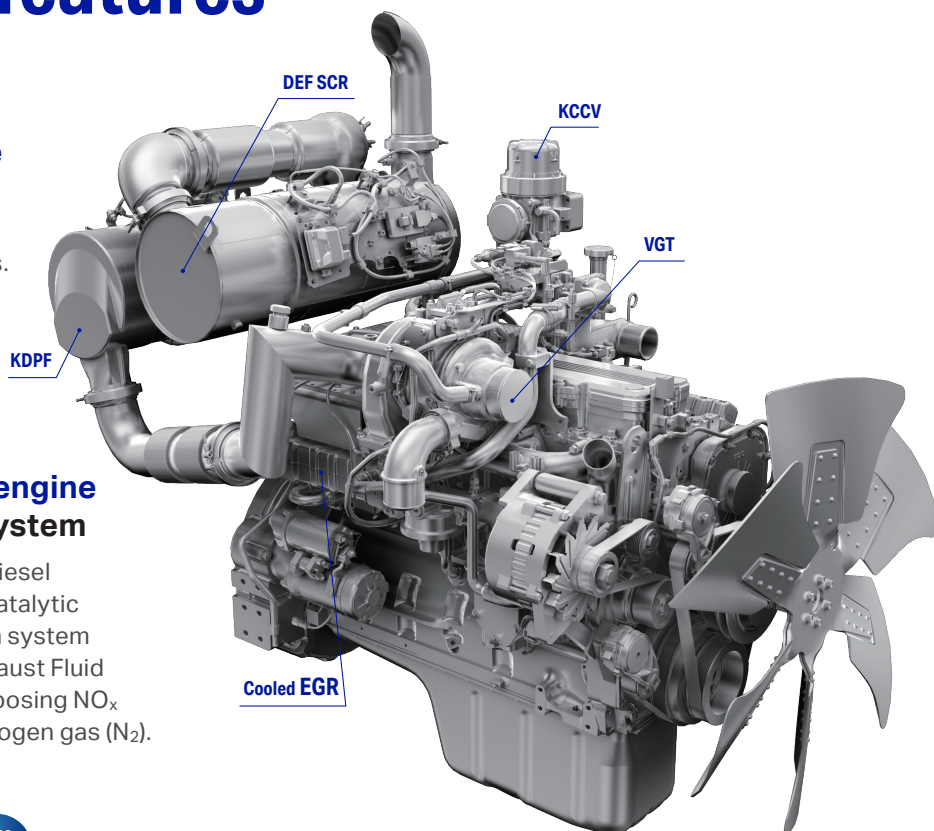

## Heavy-duty cooled Exhaust Gas Recirculation (EGR) system

The system recirculates a portion of exhaust gas into the air intake and lowers combustion temperatures, thereby reducing NO<sub>x</sub> emissions. EGR gas flow has been decreased for Tier 4 Final with the addition of SCR technology. The system achieves a dynamic reduction of NO<sub>x</sub>, while helping reduce fuel consumption below Tier 4 Interim levels.

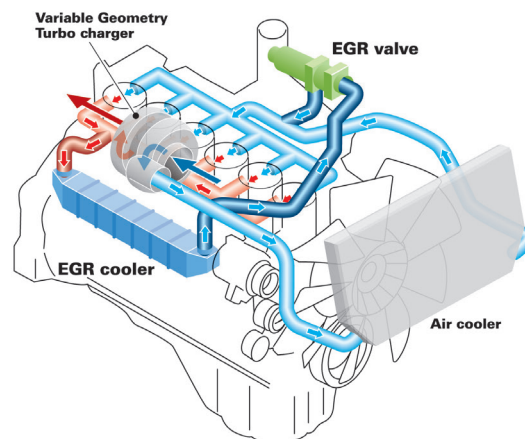




Hey, Scott - are these bullet points, or headings, with further information required?

## Variable Geometry Turbocharger (VGT) system

The VGT system features proven Komatsu design hydraulic technology for variable control of air-flow and supplies optimal air according to load conditions. The upgraded version provides better exhaust temperature management.

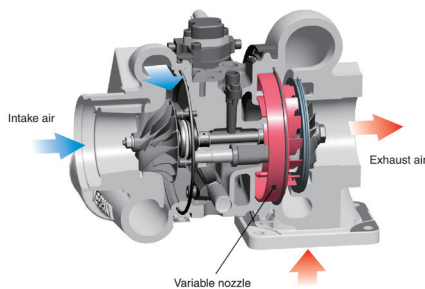

## Komatsu auto idle

Komatsu auto idle automatically reduces engine RPM after 4 seconds of work equipment inactivity to reduce unnecessary fuel consumption and exhaust emissions.

## Komatsu auto idle shutdown

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions. The amount of time before the engine is shutdown can be easily programmed from 5 to 60 minutes.

## Working Modes Selectable

## Ecology Guidance

## Ecology Gauge & Fuel Consumption Gauge

## Idling Caution

## Increased Work Efficiency

### Large digging force

With the one-touch Power Max. function, digging force is increased for 8.5 seconds of operation.

### Maximum arm crowd force (ISO 6015)

**160 kN (16.3t) ➔ 171 kN (17.4t) 7%<sub>up</sub>**  
(with Power Max.)

### Maximum bucket digging force (ISO 6015)

**212 kN (21.6t) ➔ 227 kN (23.1t) 7%<sub>up</sub>**  
(with Power Max.)

Measured with power max. function, 3185mm arm and ISO 6015 rating

### Faster arm cycle speeds

Two return hoses improve arm cylinder hydraulic flow for faster arm out performance.

### Two-mode settings for boom

- Smooth boom mode reduces boom down force for working on hard surfaces or for hydraulic hammer operation
- Power boom mode maximises digging force for more effective excavating

### Lifting mode

When the Lifting mode is selected, lifting capacity is increased 7% by raising hydraulic pressure.




## Drawbar pull

The Komatsu designed final drives and undercarriage provide high drawbar pull for good maneuverability and performance when working on adverse grades or soft ground.



## Grease sealed track

The HB365LC-3 uses grease sealed tracks for extended undercarriage life.



## Large displacement high efficiency pump


Large displacement hydraulic implement pumps provide high flow output at lower engine RPM as well as operation at the most efficient engine speed.



## Working mode selection


The HB365LC-3 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Power Mode provides improved hydraulic power and faster cycle times for improved performance in demanding applications. Each mode is designed to match engine speed, pump flow, and system pressure to the application. The HB365LC-3 features an attachment mode (ATT/E) that allows operators to run attachments while in Economy mode.

| Working mode   | Application                 | Advantage                                      |
|----------------|-----------------------------|--|
| <b>P</b>       | Power mode                  | Maximum production, power & multifunction      |
| <b>E</b>       | Economy mode                | Good cycle times with reduced fuel consumption |
| <b>L</b>       | Lifting mode / Fine control | Increased lifting power & fine control         |
| <b>B</b>       | Breaker mode                | One way flow for hydraulic breaker operation   |
| <b>ATT / P</b> | Attachment power mode       | Two way flow with maximum power                |
| <b>ATT / E</b> | Attachment economy mode     | Two way flow with most efficient fuel economy  |

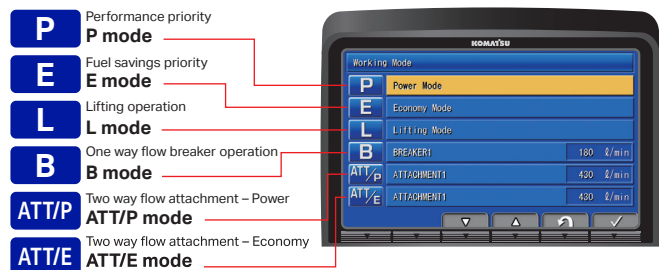

## High rigidity work equipment

booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross sectional areas and large one piece castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. A standard HD boom design provides increased strength and reliability.

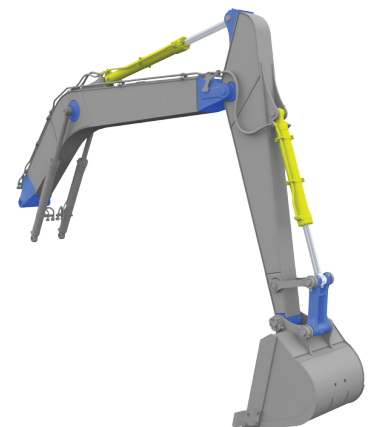





# Hybrid technology

## Komatsu hybrid technology

### Reliable and durable hybrid components developed and manufactured by Komatsu

The unique Komatsu hybrid system uses an electric swing motor-generator to capture and regenerate swing energy as the upper structure slows down and converts it into electric energy. The regenerated energy is stored in a high performance capacitor and used to provide power to the swing motor when swinging. The capacitor also powers an engine mounted motor-generator to assist the engine when it needs to accelerate. The hybrid system reduces fuel consumption significantly. Most components of the system are developed and manufactured by Komatsu.

\*: Except capacitor cells

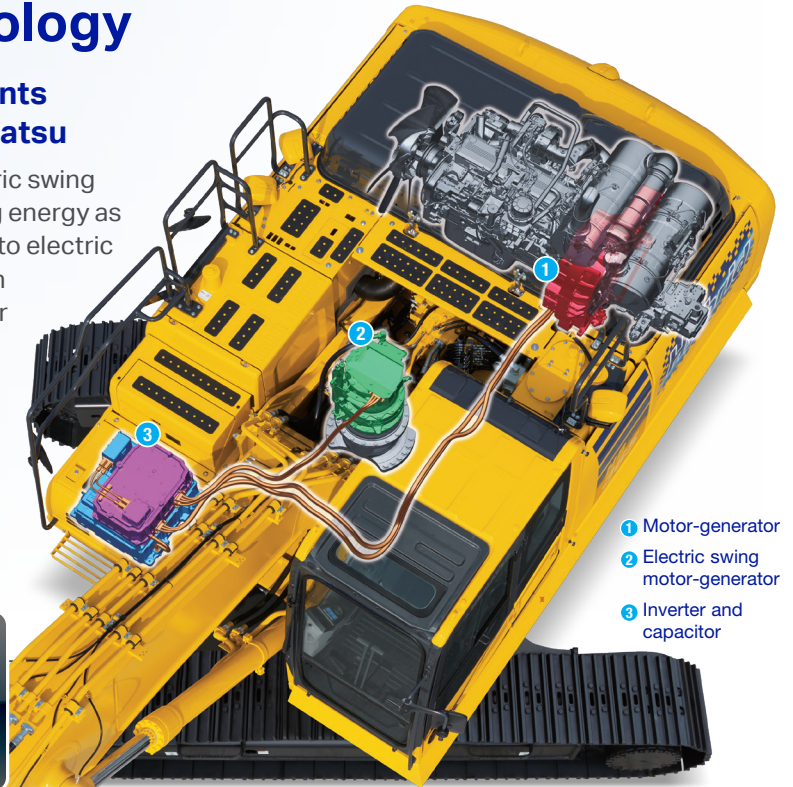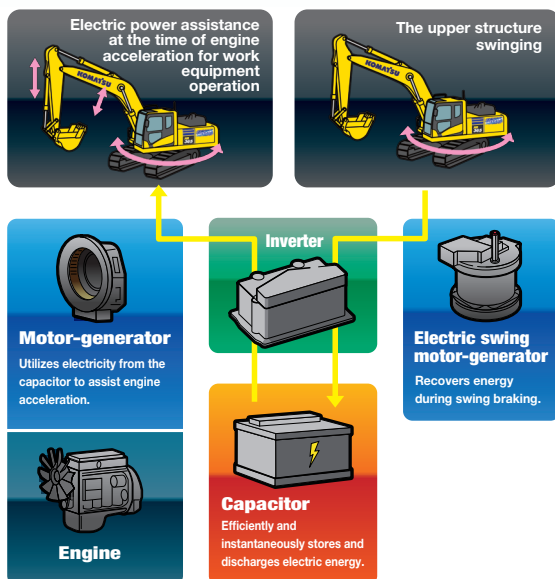


### Ultra capacitor assembly

the ultra-capacitor assembly includes an inverter that switches the AC electricity from the generator motor and swing motor into DC electricity for storage in the capacitor. Since capacitors require migration of electrons and ions for charging and discharging, they can transfer power much faster than batteries, which use chemical reactions to produce electricity. The industrial quality designed inverter and capacitor provide long service life, and require no periodic maintenance.

### Motor-generator

A motor-generator is positioned between the engine and hydraulic pumps to assist in rapid engine response from ultra low idle when required. The generator produces electric power and charges the capacitor when required.



### Electric swing motor-generator

An electric swing motor-generator recovers energy during swing braking. The motor-generator also accelerates the swing of the upper structure more efficiently than a conventional hydraulic motor and provides excellent swing performance. Dedicated lubrication and cooling systems are used for reliability and durability.




# Hybrid technology

## Easy-to-understand hybrid operation monitor screen

### Energy management screen

The hybrid system operating status can be easily displayed on the monitor to show how energy is flowing through the system components which include capacitor charging/discharging and engine assist by the generator/motor.

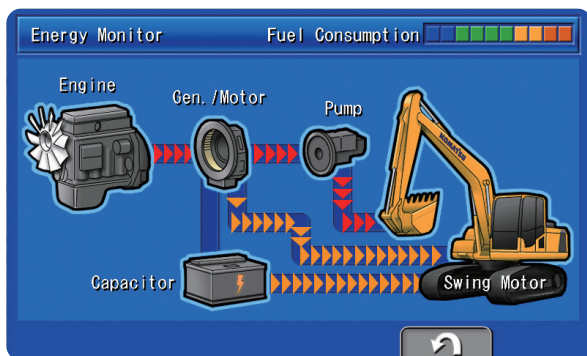

### Hybrid system temperature gauge

A hybrid system temperature gauge is included in the main display screen along with engine and hydraulic temperature gauges. It displays the hybrid system temperature and allows the operator to monitor the system status at a glance.



Hybrid system temperature gauge

**The advanced technology of the Komatsu Hybrid System, combined with the innovative design of the Tier 4 Final engine and the integration of a comprehensive vehicle control system, results in an additional reduction in fuel consumption.**

### Fuel consumption

**Reduced by up to 20%**  
(vs PC360LC-11)

Based on typical work pattern collected via Komtrax®.

### Viscous Fan Clutch

A temperature controlled viscous fan clutch improves engine efficiency and reduces engine power requirements when operating in cooler temperatures.

### External noise level

vs PC360LC-11

**Reduced by 4dB(A)**

Based on ISO 6395 dynamic test.





# General features

## ROPS cab structure

### ROPS Cab (ISO 12117-2)


The machine is equipped with a ROPS cab that conforms to ISO 12117-2 for excavators as standard equipment. It also satisfies the requirements for Level 1 Operator Protective Guard (OPG) and top guard (ISO 10262).



## Rear view monitoring system

A rear view monitoring system display has a rear view camera image that is continuously displayed together with the gauges and important vehicle information. This enables the operator to carry out work while easily checking the surrounding area.

Rear view camera




Rear view image on monitor



## Low vibration with viscous cab mounts

The HB365LC-3 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

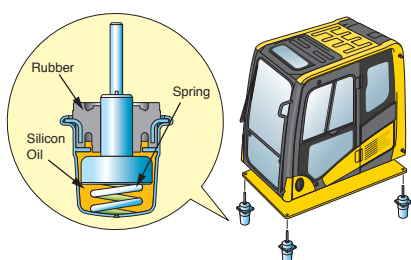

## General features

Secondary engine shut down switch at base of seat to shutdown the engine.



Seat belt caution indicator



Lock lever  
Retractable seat belt  
Tempered & tinted glass  
Large cab entrance step  
Left and right side handrails

Large mirrors  
Slip-resistant plates  
Thermal and fan guards  
Pump/engine compartment partition  
Travel alarm



# Working environment



## Comfortable working space

### Wide spacious cab

Wide spacious cab includes seat with reclining backrest. The seat height and position are easily adjusted using a pull-up lever. You can set the appropriate operational posture of armrest together with the console. Reclining the seat further enables you to place it into the fully flat state with the headrest attached.

### Arm rest with simple height adjustment

A knob and plunger on the armrests allows easy height adjustment without the use of tools.



### Low vibration with cab damper mounting

### Automatic climate control

### Pressurised cab with cab air filter

### Auxiliary input jack

Connecting a regular audio device to the auxiliary jack allows the operator to hear the sound from the speakers.



## Standard equipment

Sliding window glass (left side)



AM / FM stereo radio and ashtray



Defroster (conforms to the ISO standard)



One-touch storable front window lower glass



Remote intermittent wiper with windshield washer



Magazine box and cup holder



Hey, Scott - are these bullet points, or headings, with further information required?



## Large high resolution LCD monitor



### New monitor panel interface design

An updated large high resolution LCD colour monitor enables accurate and smooth work. The interface has been redesigned to display key machine information in a new user friendly interface. A rear view camera and a DEF level gauge display have been added to the default main screen. The interface has a function that enables the main screen mode to be switched, thus enabling the optimum screen information for the particular work situation to be displayed.

#### Indicators

- |                                    |                                   |
|------------------------------------|-----------------------------------|
| 1 Auto-decelerator                 | 9 Hydraulic oil temperature gauge |
| 2 Working mode                     | 10 Fuel gauge                     |
| 3 Travel speed                     | 11 DEF level gauge                |
| 4 Camera direction display         | 12 DEF level caution lamp         |
| 5 Ecology gauge                    | 13 Service meter, clock           |
| 6 Camera display                   | 14 Fuel consumption gauge         |
| 7 Hybrid system temperature gauge  | 15 Guidance icon                  |
| 8 Engine coolant temperature gauge | 16 Function switches              |

#### Basic operation switches

- |                         |                 |
|-------------------------|-----------------|
| 1 Auto-decelerator      | 4 Buzzer cancel |
| 2 Working mode selector | 5 Wiper         |
| 3 Travel speed selector | 6 Window washer |

### Visual user menu


Pressing the F6 key on the main screen displays the user menu screen. The menus are grouped for each function, and use easy-to-understand icons which enable the machine to be operated easily.



- |                                       |                   |
|---------------------------------------|-------------------|
| 1 Energy saving guidance              | 4 SCR information |
| 2 Machine settings                    | 5 Maintenance     |
| 3 Aftertreatment devices regeneration | 6 Monitor setting |
|                                       | 7 Message check   |

### Switchable display modes

The main screen display mode can be changed by pressing the F3 key. Screen images shown are for the standard rear view camera.

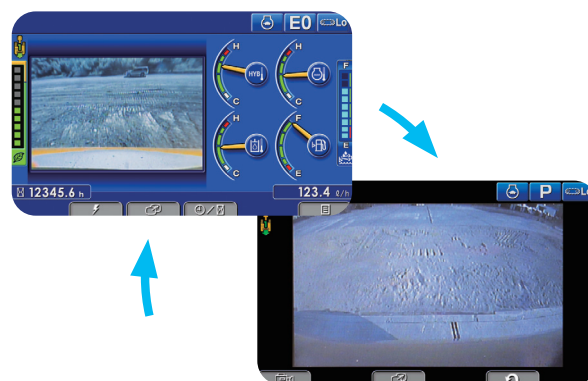

# Working environment

## Support efficiency improvement

### Ecology guidance

While the machine is operating, ecology guidance pops up on the monitor screen to notify the operator of the status of the machine in real time.

### Ecology gauge and fuel consumption gauge

The monitor screen is provided with an ecology gauge and also a fuel consumption gauge which is displayed continuously. In addition, the operator can set any desired target value of fuel consumption (within the range of the green display), enabling the machine to be operated with better fuel economy.



Ecology gauge


Fuel consumption gauge

### Operation record, fuel consumption history, and ecology guidance record


The ecology guidance menu enables the operator to check the operation record, fuel consumption history and ecology guidance record from the ecology guidance menu, using a single touch, thus assisting operators with reducing total fuel consumption.



Operation record



Fuel consumption history



Ecology guidance record

### KomVision

Images from 4 camera's are combined to display a "birds eye" view of the area around the machine for improved operator awareness. A second display with selectable individual

camera views of the left, rear, and right sides is easily changed using the F4 button. A red line continuously shows where the counterweight will be during swinging and a camera icon indicates which camera is being displayed on individual camera display screen.





## Maintenance features



## Large capacity air cleaner

The larger air cleaner can extend air cleaner life during long-term operation and helps prevent early clogging, and resulting power loss. A radial seal design is used for reliability.



## Engine access

Large rear opening hood provides excellent maintenance and service access to key engine components.



## Fuel filters

Large high-efficiency fuel filter and pre-filter with water separator removes contaminants from fuel for improved fuel injection system life.



High efficiency fuel filter

Fuel pre-filter (with water separator)

## Easy access to engine oil filter and fuel drain valve

Engine oil filter and fuel drain valve are remote mounted to improve accessibility.



## Battery isolation switch

A standard battery isolation switch allows a technician to disconnect the power supply and lock out before servicing the machine.



## Air conditioner filter

The air conditioner filter can be removed and installed without the use of tools for easy filter maintenance.

## Washable cab floormat


## Sloping track frame

## Long-life oils, filters

|                                |                  |
|--------------------------------|------------------|
| Engine oil & Engine oil filter | every 500 hours  |
| Hydraulic oil                  | every 5000 hours |
| Hydraulic oil filter           | every 1000 hours |


## DT-type connectors

Sealed DT-type electrical connectors provide high reliability, water and dust resistance.



## Diesel Exhaust Fluid (DEF) tank

A large tank volume extends operating time before refilling and is installed on the right front platform for easy access. DEF tank and pump are separated for improved service access.




## Maintenance information

### "Maintenance time caution lamp" display

When the remaining time to maintenance becomes less than 30 hours\*, a maintenance time monitor appears. Pressing the F6 key switches the monitor to the maintenance screen.

\*: The setting can be changed within the range between 10 and 200 hours.




Maintenance screen

### Manual Stationary Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel. A soot level indicator is displayed to show how much soot is trapped in the KDPF.

Soot level indicator



Aftertreatment device regeneration screen

### Supports the DEF level and refill timing

The DEF level gauge is displayed continuously on the right side of the monitor screen. In addition, when DEF level is low, DEF low level guidance messages appear in pop up displays to inform the operator in real time.



DEF level gauge



DEF low level guidance



## Komtrax® equipment monitoring

Get the whole story with



### What

- Komtrax® is Komatsu's remote equipment monitoring and management system. Komtrax® continuously monitors and records machine health and operational data.
- Information such as fuel consumption, utilisation, and a detailed history lowering owning and operating cost.

### Who

- Komtrax® is standard equipment on all Komatsu construction products.

### When


- Know when your machines are running or idling and make decisions that will improve your fleet utilisation.
- Detailed movement records ensure you know when and where your equipment is moved.
- Up to date records allow you to know when maintenance is due and help you plan for future maintenance needs.

### Where

- Komtrax® data can be accessed virtually anywhere through your computer, the web or your smart phone.
- Automatic alerts keep fleet managers up to date on the latest machine notifications.

### Why

- Knowledge is power – make informed decisions to manage your fleet better.
- Knowing your idle time and fuel consumption will help maximise your machine efficiency.
- Take control of your equipment – any time, anywhere.



**KOMTRAX**

For construction and compact equipment.

**KOMTRAX Plus**

For production and mining class machines.

# Specifications

## Engine

|                                       |   |
|---------------------------------------|---|
| Model                                 | Komatsu SAA6D114E-6*                    |
| Type                                  | Water-cooled, 4-cycle, direct injection |
| Aspiration                            | Turbocharged, aftercooled, cooled EGR   |
| Number of cylinders                   | 6                                       |
| Bore                                  | 114 mm                                  |
| Stroke                                | 144.5 mm                                |
| Piston displacement                   | 8.85 ltr                                |
| Horsepower                            |   |
| SAE J1995                             | Gross 202 kW 271 HP                     |
| ISO 9249 / SAE J1349                  | Net 201 kW 269 HP                       |
| Hydraulic fan at maximum speed        | Net 197 kW 251 HP                       |
| Rated rpm                             | 1950 rpm                                |
| Fan drive method for radiator cooling | Mechanical with viscous fan clutch      |
| Governor                              | All-speed control, electronic           |
| *EPA Tier 4 Final emissions certified |   |

## Hydraulics

|   |  |  |
|---|--|--|
| Type  | HydrauMind (Hydraulic Mechanical Intelligence) system, closed-center system with load sensing valves and pressure compensated valves |  |
| Number of selectable working modes  | 6  |  |
| Main pump:  |  |  |
| Type  | Variable displacement piston type  |  |
| Pumps for   | Boom, arm, bucket, and travel circuits   |  |
| Maximum flow  | 535 ltr/min  |  |
| Supply for control circuit  | Self reducing valve  |  |
| Hydraulic motors:   |  |  |
| Travel  | 2 x axial piston motors with parking brake   |  |
| Swing   | 1 x axial piston motor with swing holding brake  |  |
| Relief valve setting:   |  |  |
| Implement circuits  | 38.2 MPa 390 kg/cm <sup>2</sup>  |  |
| Travel circuit  | 38.2 MPa 390 kg/cm <sup>2</sup>  |  |
| Pilot circuit   | 3.2 MPa 33 kg/cm <sup>2</sup>  |  |
| Hydraulic cylinders: (Number of cylinders – bore x stroke x rod diameter) |  |  |
| Boom  | 2–140 mm x 1480 mm x 100 mm  |  |
| Arm   | 1–160 mm x 1825 mm x 110 mm  |  |
| Bucket  | for 3200mm and 4000mm Arms 1–140mm x 1285mm x 100mm  |  |

## Drives and brakes

|                                    |                       |              |
|------------------------------------|-----------------------|--------------|
| Steering control                   | Two lever with pedals |              |
| Drive method                       | Fully hydrostatic     |              |
| Maximum drawbar pull               | 290 kN 29570 kg       |              |
| Gradeability                       | 70%, 35°              |              |
| Maximum travel speed (auto shift): |                       |              |
| High 5.5 km/h                      | Mid 4.5 km/h          | Low 3.2 km/h |
| Service brake                      | Hydraulic lock        |              |
| Parking brake                      | Mechanical disc brake |              |

## Swing system

|                            |                       |
|----------------------------|-----------------------|
| Drive method               | Electric drive        |
| Swing reduction            | planetary gear        |
| Swing circle lubrication   | Grease-bathed         |
| Service brake              | Electric brake        |
| Holding brake / swing lock | Mechanical disc brake |
| Swing speed                | 9.5 rpm               |
| Swing torque               | 11386 kg•m            |

## Undercarriage

|                                       |             |
|---------------------------------------|-------------|
| Centre frame                          | X-frame     |
| Track frame                           | Box-section |
| Track type                            | Sealed      |
| Track adjuster                        | Hydraulic   |
| Number of shoes (each side)           | 48          |
| Number of carrier rollers (each side) | 2           |
| Number of track rollers (each side)   | 8           |

## Coolant and lubricant capacity (refilling)

|                                |          |
|--------------------------------|----------|
| Fuel tank                      | 605 ltr  |
| Coolant (engine)               | 42.0 ltr |
| Ultra capacitor cooling system | 11.7 ltr |
| Engine                         | 38.5 ltr |
| Final drive, each side         | 9.0 ltr  |
| Swing drive                    | 15.6 ltr |
| Swing motor - generator        | 3.6 ltr  |
| Motor-generator                | 8.5 ltr  |
| Hydraulic tank                 | 188 ltr  |
| DEF tank                       | 39.2 ltr |

## Sound performance

|                     |           |
|---------------------|-----------|
| Exterior – ISO 6395 | 101 dB(A) |
| Operator – ISO 6396 | 69 dB(A)  |

## Operating Weight (approximate)

Operating weight including 6500 mm one-piece HD boom, 3185 mm arm, 850 mm rack shoes, SAE heaped 1.96 m<sup>3</sup> bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.

| Triple-grouser | Operating weight | Ground pressure (ISO 16754) |
|----------------|------------------|-----------------------------|
| 700mm          | 37654 kg         | 0.62 kg/cm <sup>2</sup>     |
| 850mm          | 38254 kg         | 0.52 kg/cm <sup>2</sup>     |

## Component weights


|  |            |
|--|------------|
| Arm including bucket cylinder and linkage    |            |
| 3185 mm arm assembly                         | 1761 kg    |
| 4020 mm arm assembly                         | 1988 kg    |
| One piece HD boom including arm cylinder     |            |
| 6500 mm boom assembly                        | 3135 kg    |
| Boom cylinders x 2                           | 259 kg     |
| Counterweight                                | 6320 kg    |
| 1.96 m <sup>3</sup> TL bucket - 1371mm width | 1554 kg    |
| Plus one piped boom and arm                  | Add 100 kg |



### Dimensions

|   | Arm Length                            | 3185mm   |
|---|---------------------------------------|----------|
| A | Overall length                        | 11145 mm |
| B | Length on ground (transport)          | 5935 mm  |
| C | Overall height (to top of boom)*      | 3285 mm  |
| D | Overall width                         | 3440 mm  |
| E | Overall height (to top of cab)*       | 3165 mm  |
| F | Overall height (to top of handrail)*  | 3260 mm  |
| G | Ground clearance, counterweight       | 1185 mm  |
| H | Ground clearance, minimum             | 498 mm   |
| I | Tail swing radius                     | 3445 mm  |
| J | Track length on ground                | 4030 mm  |
| K | Track length                          | 4955 mm  |
| L | Track gauge                           | 2590 mm  |
| M | Width of crawler                      | 3440 mm  |
| N | Shoe width                            | 850 mm   |
| O | Grouser height                        | 36 mm    |
| P | Machine height to top of engine cover | 3140 mm  |
| Q | Machine upper width **                | 3140 mm  |
| R | Distance, swing center to rear end    | 3405 mm  |

\* Including grouser height

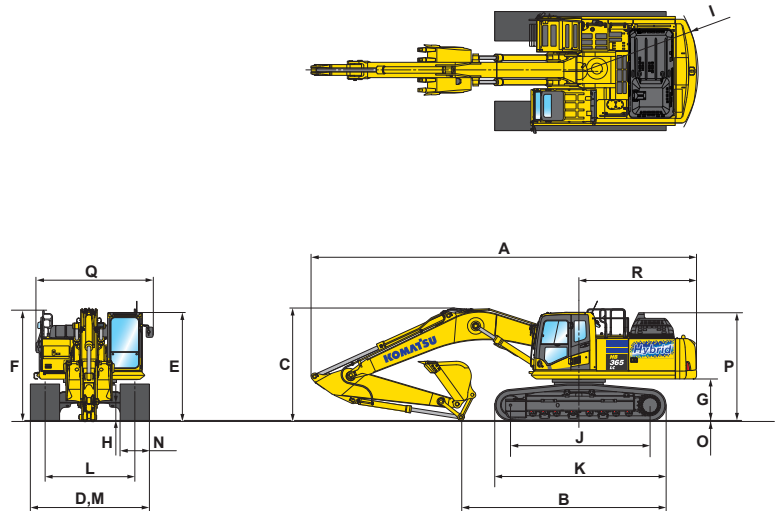


### Standard equipment

- 3 speed travel with auto shift
- Alternator, 24 V/90 A
- AM/FM radio
- Arm holding valve
- Auto idle
- Auto idle shut down programmable
- Automatic climate control/air conditioner/ heater/ defroster
- Automatic engine warm-up system
- Auxiliary input (3.5 mm jack)
- Batteries, large capacity (2 x 12V)
- Battery master disconnect switch
- Bolt-on top guard, OPG Level 2
- Boom holding valve
- Carbody swivel guard
- Carrier roller (2 each side)
- Counterweight, 6320 kg
- Dry type air cleaner, double element
- Electric horn
- Electric swing motor/generator
- Engine mounted motor/generator
- Engine overheat prevention system
- Engine, Komatsu SAA6D114E-6
- Equipment Management Monitoring System (EMMS)
- Fuel pre-filter (10 micron, with water separator)
- Fuel priming pump
- High back air suspension seat with heat
- Hybrid component cooling system
- Hydraulic track adjusters (Each side)
- Komtrax® level 5.0
- KomVision surround camera system
- KomVision birds eye view
- Large high resolution 7" LCD monitor
- Lock lever, work equipment
- Lower front window guard
- Mirrors (RH and LH)
- Operator identification system
- Operator protective top guard (OPG), level 2
- Power maximising system
- Power ports (2) 24V to 12V
- PPC hydraulic control system
- Proportional control handles for auxiliary hydraulics
- Pump/engine compartment partition
- Radiator and oil cooler removable debris screen
- Rear reflector
- Revolving frame deck guards
- Revolving frame under covers
- ROPS cab (ISO 12117-2)
- Seat belt indicator
- Seat belt, retractable, 76 mm 3"
- Secondary engine shut down switch
- Service valve, one additional function
- Slip resistant plates
- Starting motor, 24 V/11 kW
- Thermal and fan guards
- Track roller guards (full length)
- Track roller, 8 each side
- Track shoe, triple grouser, 600 mm
- Travel alarm
- Two-mode setting for boom
- Ultra capacitor with inverter
- Viscous fan clutch, temperature controlled
- Working lights, 6 1 x boom, 1 x RHS near steps, 2 x cab front, 1 x cab rear, 1 x counterweight
- Working mode selection system

### Optional equipment

- Cab guards
- Full front guard, OPG Level 2
- Undercarriage
- Track shoes, triple grouser, 700 mm
- Track shoes, triple grouser, 850 mm

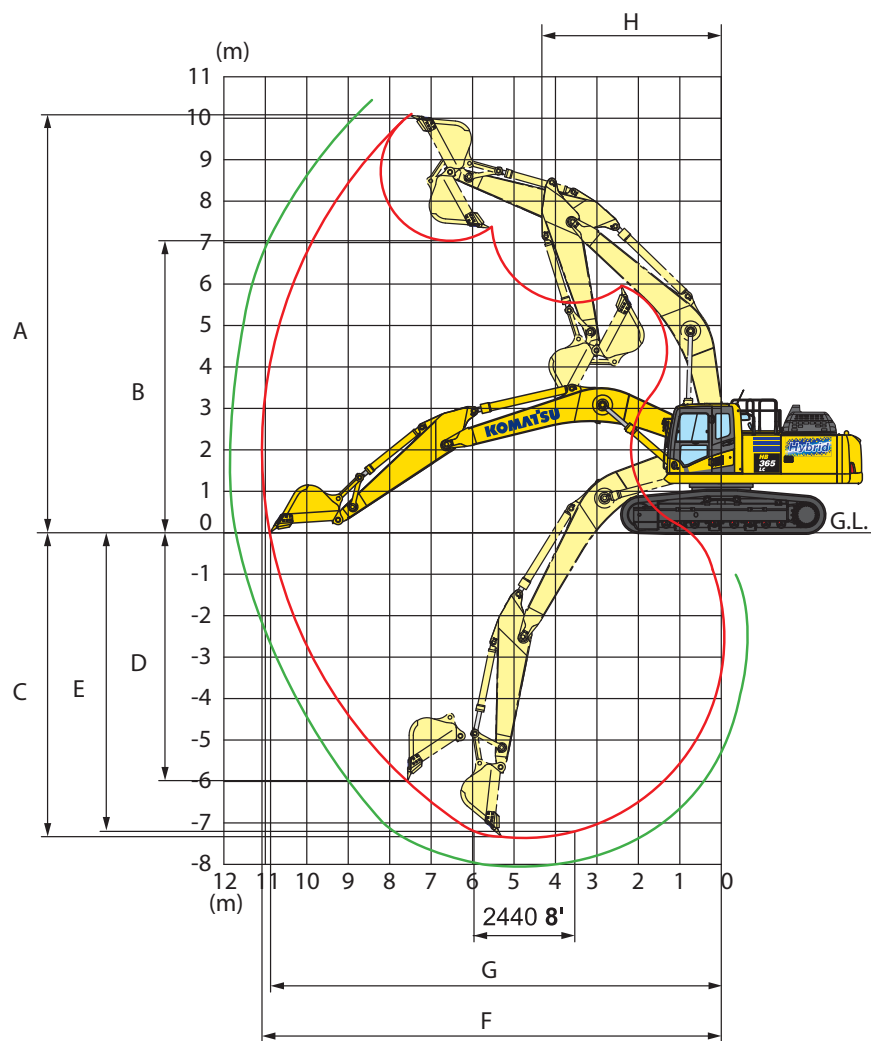


## Working range

| Arm Length                            |  | 3185 mm            |
|---------------------------------------|--|--------------------|
| A                                     | Maximum digging height                       | 10210 mm           |
| B                                     | Maximum dumping height                       | 7110 mm            |
| C                                     | Maximum digging depth                        | 7380 mm            |
| D                                     | Maximum vertical wall digging depth          | 6480 mm            |
| E                                     | Maximum digging depth for 203mm level bottom | 7180 mm            |
| F                                     | Maximum digging reach                        | 11100 mm           |
| G                                     | Maximum digging reach at ground level        | 10920 mm           |
| H                                     | Minimum swing radius                         | 4310 mm            |
| SAE rating:                           |  |                    |
| Bucket digging force at maximum power |  | 200 kN<br>20400 kg |
| Arm crowd force at maximum power      |  | 165 kN<br>16800 kg |
| ISO rating:                           |  |                    |
| Bucket digging force at maximum power |  | 228 kN<br>23200 kg |
| Arm crowd force at maximum power      |  | 171 kN<br>17400 kg |



### Lifting capacity with lifting mode



- A Reach from swing centre
- B Bucket hook height
- C Lifting capacity
- Cf Rating over front
- Cs Rating over side
- ⊗ Rating at maximum reach

- Conditions:
- 6500mm one-piece boom
  - Bucket: None
  - Lifting mode: On

Arm: 3185mm


Bucket: None

Shoes: 700mm

Unit: kg

| B \ A  | 3.0m   |        | 4.6m   |        | 6.1m   |       | 7.6m   |      | 9.1m |      | ⊗ Max |       |
|--------|--------|--------|--------|--------|--------|-------|--------|------|------|------|-------|-------|
|        | Cf     | Cs     | Cf     | Cs     | Cf     | Cs    | Cf     | Cs   | Cf   | Cs   | Cf    | Cs    |
| 7.6 m  | -      | -      | -      | -      | -      | -     | -      | -    | -    | -    | *7250 | *7250 |
| 6.1 m  | -      | -      | -      | -      | -      | -     | *8890  | 7530 | -    | -    | *7050 | 6390  |
| 4.6 m  | -      | -      | -      | -      | *10740 | 10170 | *9370  | 7370 | -    | -    | *7100 | 5690  |
| 3.0 m  | -      | -      | *16210 | 14500  | *12090 | 9710  | *10030 | 7140 | 8160 | 5520 | *7380 | 5340  |
| 1.5 m  | -      | -      | *18180 | 13690  | *13220 | 9290  | 10410  | 6910 | 8050 | 5410 | 7740  | 5210  |
| 0 m    | -      | -      | *18550 | 13330  | *13740 | 9010  | 10230  | 6750 | 7960 | 5340 | 7910  | 5300  |
| -1.5 m | *13710 | *13710 | *17720 | 13260  | *13480 | 8900  | 10140  | 6670 | -    | -    | 8480  | 5660  |
| -3.0 m | *20540 | *20540 | *15850 | 13360  | *12300 | 8900  | *8930  | 6720 | -    | -    | *8870 | 6430  |
| -4.6 m | *15670 | *15670 | *12560 | *12560 | *9590  | 9130  | -      | -    | -    | -    | *8870 | 6430  |
| -6.1 m | -      | -      | -      | -      | -      | -     | -      | -    | -    | -    | *8350 | *8170 |

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on SAE standard No. J1097.  
Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



- A Reach from swing centre
- B Bucket hook height
- C Lifting capacity
- Cf Rating over front
- Cs Rating over side
- ⊗ Rating at maximum reach

- Conditions:
- 6500mm one-piece boom
  - Bucket: None
  - Lifting mode: On

Arm: 3185mm

Bucket: None

Shoes: 850mm

Unit: kg

| B \ A  | 3.0m   |        | 4.6m   |        | 6.1m   |       | 7.6m   |      | 9.1m |      | ⊗ Max |       |
|--------|--------|--------|--------|--------|--------|-------|--------|------|------|------|-------|-------|
|        | Cf     | Cs     | Cf     | Cs     | Cf     | Cs    | Cf     | Cs   | Cf   | Cs   | Cf    | Cs    |
| 7.6 m  | -      | -      | -      | -      | -      | -     | -      | -    | -    | -    | *7250 | *7250 |
| 6.1 m  | -      | -      | -      | -      | -      | -     | *8890  | 7630 | -    | -    | *7050 | 6470  |
| 4.6 m  | -      | -      | -      | -      | *10740 | 10300 | *9370  | 7460 | -    | -    | *7100 | 5770  |
| 3.0 m  | -      | -      | *16210 | 14690  | *12090 | 9830  | *10030 | 7230 | 8280 | 5590 | *7380 | 5410  |
| 1.5 m  | -      | -      | *18180 | 13880  | *13220 | 9410  | 10560  | 7010 | 8160 | 5490 | 7850  | 5290  |
| 0 m    | -      | -      | *18550 | 13520  | *13740 | 9140  | 10380  | 6840 | 8080 | 5410 | 8030  | 5380  |
| -1.5 m | *13710 | *13710 | *17720 | 13450  | *13480 | 9020  | 10290  | 6770 | -    | -    | 8610  | 5740  |
| -3.0 m | *20540 | *20540 | *15850 | 13550  | *12300 | 9050  | *9440  | 6810 | -    | -    | *8870 | 6520  |
| -4.6 m | *15670 | *15670 | *12560 | *12560 | *9590  | 9260  | -      | -    | -    | -    | *8350 | 8290  |

\* Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567.  
Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.





## Notes

---

Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are Komatsu's standard written warranties, which will be furnished upon request.

Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu Australia Pty Ltd., Komatsu New Zealand Limited, Komatsu America Corp., Komatsu Mining Corp., or one of their affiliates, or the respective owners or licensees.

**KOMATSU**

[komatsu.com.au](https://komatsu.com.au)

